


ULTRA-PRO[®] MELROSE

UNDER FLOOR HEATING SYSTEM

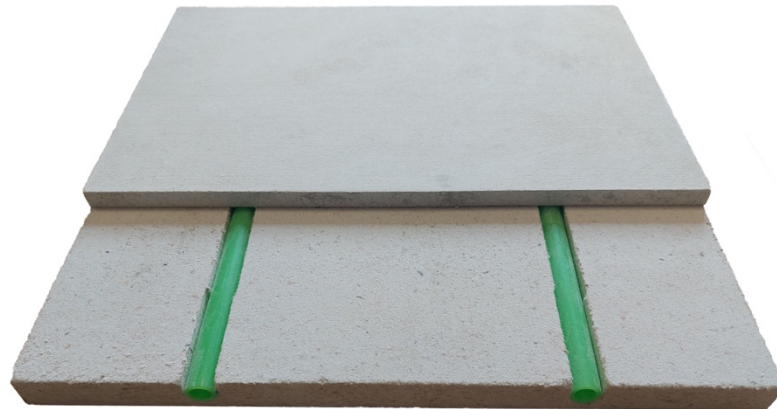

TECHNICAL SPECIFICATIONS

Standard Dimensions	Top Panel: 1200mm x 620mm x 10mm Bottom Panel: 1200mm x 620mm x 18mm
Thickness	Top: 10mm. Bottom: 18mm
Weight	Top: 9.15kg. Bottom: 14.6kg
Pipe centres	100mm. 150mm. (accommodates 12mm pipe)
Density	1150kg/m ³
Reaction to fire	A2 (13EN-13501-1)
Swelling after 24hrs contact with water	<2%
BBA Certificate	90/2439
European Technical approval	ISO 9001 / ISO 14001 / 2015

BENEFITS OF OVERLAY PANELS

- ✓ High performance underfloor heating system
- ✓ Low profile (28mm). Reduces impact on floor heights
- ✓ Dry installation accelerates project times
- ✓ Improves impact and airborne sound
- ✓ Routed for 12mm pipe at 150mm or 100mm centres
- ✓ Solid Finish
- ✓ High precision engineered panel



ULTRA PRO
 Clavering, Essex.
 CB11 4PW.
 TEL: 01799 550222.
 Web: www.ultra-pro.co.uk

