


ULTRA-PRO® TRIBECA

UNDER FLOOR HEATING SYSTEM

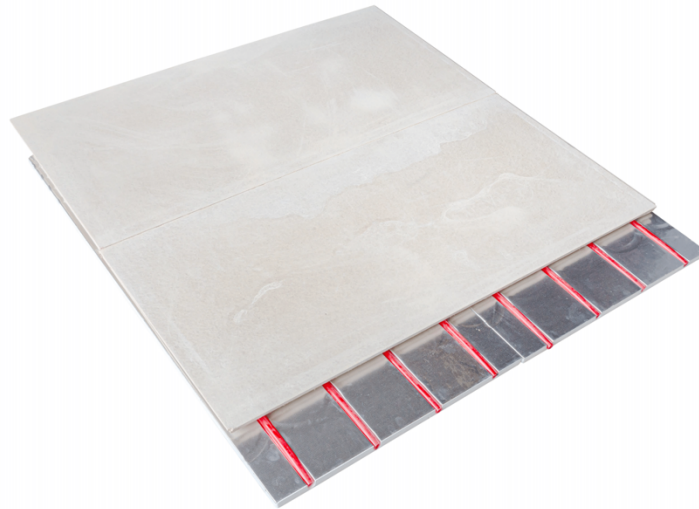

TECHNICAL SPECIFICATIONS

Standard Dimensions

Top Panel: 1200mm x 600mm x 10mm / 18mm

Bottom Panel: 1200mm x 600mm x 16mm / 20

Pipe centres

150mm. (accommodates 12mm or 16mm pipe)

Density

Bottom: 42kg/m³. Top: 1150kg/m³

Reaction to fire

A2 (13EN-13501-1)

Swelling after 24hrs contact with water

<2%

BBA Certificate

90/2439

European Technical approval

ISO 9001 / ISO 14001 / 2015

BENEFITS OF OVERLAY PANELS

- ✓ High performance underfloor heating system
- ✓ Low profile 26mm – 40mm (with gypsum overlay), Reduces impact on floor heights
- ✓ Dry installation accelerates project times
- ✓ Improves impact and airborne sound
- ✓ Routed for 12mm or 16mm pipe at 150mm centres
- ✓ Solid Finish
- ✓ High precision engineered panel



ULTRA PRO
Clavering, Essex.
CB11 4PW.

TEL: 01799 550222.

Web: www.ultra-pro.co.uk



ULTRA-PRO
Innovation In Flooring